



Enermass Power Solutions Pvt. Ltd.

INTEGRATED SOLAR AND POWER ENGINEERING SOLUTIONS

First Floor, AVM Complex · Chirangara Koratty Post · Thrissur, Kerala – 680 308
+91-81 380 27336 · info@enermass.in · www.enermass.in

PROPOSAL REFERENCE

EPS-COKL-002992627

Date: 28 June 2026

Valid: 28 July 2026

TECHNO-COMMERCIAL PROPOSAL · KERALA · RESIDENTIAL

Solar Power Plant Proposal

Grid-Connected Rooftop Solar Power Plant — Net Metering

3 kWp

Kerala

Mr. Linjith

Residential

Valid 30 Days

₹0

ANNUAL SAVINGS

5.2 yrs

PAYBACK PERIOD

₹5,11,912

25-YEAR RETURNS

3.6 T/yr

CO₂/YEAR

PROPOSAL OVERVIEW

3 kWp

SYSTEM CAPACITY

₹2,18,000

TOTAL PROJECT COST

Before subsidy deduction

₹1,40,000

CUSTOMER
COMMITMENT

After subsidy — net payment

5.2 yrs

PAYBACK PERIOD

₹0

TOTAL ANNUAL BENEFIT

₹5,11,912

25-YEAR RETURNS

30 Days

PROPOSAL VALIDITY

Residential · Kerala · Grid-Connected Rooftop Solar Power Plant — Net Metering

Mr. Linjith · 28 June 2026

PREPARED BY

Enermass Power Solutions Pvt. Ltd.

+91-81 380 27336 · www.enermass.in

01 Introduction Letter

Formal cover letter from the Chief Executive Officer

TO

Mr. Linjith

DATE

28 June 2026

VALID UNTIL

28 July 2026

Ref: **EPS-COKL-002992627** **Subject:** Solar Power Plant Proposal — 3 kWp On-Grid System, Kerala

Dear Mr. Linjith,

Greetings,

Thank you for your interest in Enermass Power Solutions Pvt. Ltd.. We are pleased to present our tailored Solar Energy System proposal for your solar power plant requirement.

Established in 2018, Enermass Power Solutions Pvt. Ltd. is a forward-thinking renewable energy company committed to the 3P philosophy (People, Planet, Profit), delivering sustainable, cost-effective, and high-performance energy solutions across India. Headquartered in Kerala, we have successfully executed a wide range of solar projects nationwide, covering on-grid, off-grid, and hybrid systems across residential, commercial, industrial, and institutional sectors.

As an MNRE-empanelled EPC firm, with empanelments from ANERT, KSEBL, MSME, JRDEA, IOCL, JNKEL, KEL, and others, we provide comprehensive end-to-end services including design, engineering, procurement, installation, commissioning, and maintenance of rooftop and ground-mounted solar power plants.

We are committed to helping you reduce energy costs, lower your carbon footprint, and achieve strong returns through reliable green energy solutions.

This proposal outlines our best techno-commercial offering for your solar requirements. We look forward to your confirmation and the opportunity to partner with you on this sustainable journey.

Yours sincerely,

Manoj

Mr. Manoj M S

Chief Executive Officer
Enermass Power Solutions Pvt. Ltd.

PROPOSAL AT-A-GLANCE

System	3 kWp
Total Project Cost	₹2,18,000
Your Commitment	₹1,40,000
Payback	5.2 yrs
Annual Benefit	₹0
25-yr Returns	₹5,11,912
Validity	30 Days

SYSTEM TYPE

⚡ On-Grid System

Kerala · KSEB (Kerala State Electricity Board)

SALES CONTACT

Gigit Antony

Sales Manager

7594933374

02 Company & Customer Profile

Entity details and installation site profiles

ENERMASS PROFILE

13+
YEARS EXPERIENCE

5500+
PROJECTS COMMISSIONED

25+ MW
CAPACITY INSTALLED

COMPANY NAME

Enermass Power Solutions Pvt. Ltd.

GST NUMBER

32AAFCE1087R1ZA

PHONE / EMAIL

+91-81 380 27336 / info@enermass.in

CIN / REGISTRATION

U74999KL2018PTC053947

PAN NUMBER

AAFCE1087R

WEBSITE / ADDRESS

www.enermass.in
First Floor, AVM Complex · Chirangara Koratty Post ·
Thrissur, Kerala – 680 308

CUSTOMER & SITE DETAILS

CUSTOMER NAME

Mr. Linjith

PHONE / EMAIL

9876543210 / linjith@example.com

SITE ADDRESS

Nellayi House, Nellayi P.O., Thrissur, Kerala - 680301

CATEGORY / STATE

Residential / Kerala

DISCOM / CONNECTION METER NO.

KSEB (Kerala State Electricity Board) / KSEB-1002345

SANCTIONED LOAD / ROOF AREA

3 kW / 360 Sq.Ft.

03

System Design & Equipment Specifications

Technical configuration, sizing metrics, and equipment selection

3 kWp

SYSTEM CAPACITY

360 kWh

EST. GENERATION / MTH

4380 kWh

EST. GENERATION / YR

360 Sq.Ft.

REQUIRED ROOF AREA

KEY COMPONENT SPECIFICATIONS (EQUIPMENT DESCRIPTION & WARRANTY)

COMPONENT	DESCRIPTION & WARRANTY DETAILS
A. Solar PV Modules	Adani / Waaree / V Guard / Panasonic, 610 Wp × 5 Nos Tec-N-type TOPCON Bifacial Mono. Efficiency: ~21.5% -22.4%. Bifacial Gain~30% Low Degradation Y1~1%,After~0.4%. Product Warranty 10-12Y ,Performance Warranty 30Y
B. Inverter	On-Grid String Inverter Deye-5 — 5Kw On-Grid (Grid-Tied) String Inverter Maximum Efficiency ≥ 97.5% Total Harmonic Distortion (THD) < 3% .Warranty Minimum 10 years
C. Module Mounting Structure (MMS)	Module Mounting Structure (MMS) Make-Appolo GI Module Mounting Structure (MMS) GI.

04 Bill of Materials (BOM) — Scope of Supply

Complete line item specifications mapped to your quotation

LINE NO	COMPONENT	SPECIFICATION DETAILS	QTY	UNIT
A. SOLAR PV MODULES				
01	Solar PV Module	Tec-N-type TOPCON Bifacial Mono. Efficiency: ~21.5% -22.4%. Bifacial Gain~30% Low Degradation Y1~1%,After~0.4%. Product Warranty 10-12Y ,Performance Warranty 30Y	5	Nos
B. INVERTER				
02	On-Grid String Inverter	On-Grid (Grid-Tied) String Inverter Maximum Efficiency ≥ 97.5% Total Harmonic Distortion (THD) < 3% .Warranty Minimum 10 years	1	Lot
C. MODULE MOUNTING STRUCTURE				
03	Module Mounting Structure (MMS) Make-Appolo GI	Module Mounting Structure (MMS) GI.	1	Lot
D. DC ELECTRICAL				
04	DC Cables – 4 sqmm UV Resistant Solar Cable- Polycab, Havells, Lumicon	TÜV certified, double insulation, UV-resistant, 1500V DC, IS:694	24	Meters
05	DC Distribution Box (DCDB) with SPD	IP65, MC4 connectors, DC MCB, SPD Class II 1000V, fuse holder	1	Set
E. AC ELECTRICAL & PROTECTION				
06	AC Cables Polycab, Havells, VGuard	Multi-Stranded Flexible Cable	15	Meters
07	AC Distribution Box (ACDB) with MCB	IP65, , MCB,2P,4P, 32A, per system rating, 40kA SPD Class II	1	Set
F. EARTHING & LIGHTNING PROTECTION				
08	Earthing Kit (Copper-Bonded Rod + Chemical)	IS:3043, Copper bonded electrode	2	Nos
09	Lightning Arrester with Down Conductor	Class I+II combined, IS:3043,Multi Spike Copper Coated or Brass LA	1	Set
G. METERING & MONITORING				
10	Solar Energy Meter	DISCOM/CEIG approved, MID certified, IS:14697	1	No
11	Remote Monitoring System – Wi-Fi/GSM Data Logger	Real-time cloud dashboard, mobile app, alerts	1	No
H. CIVIL & INSTALLATION				
12	Civil Work Foundation & Grouting	As per structural drawings.	1	Lot
13	Installation, Cable Tray & Conduit	Skilled labour, safety PPE, Cable tray, ISI Wiring Conduit	1	Lot
14	Commissioning, Testing & Handover	String test, IR test, functional test, owner training	1	Lot

LINE NO	COMPONENT	SPECIFICATION DETAILS	QTY	UNIT
I. DOCUMENTATION & LIAISON				
15	Bi-Directional Net Metering Application & DISCOM Liaison	SLD, DPR, DISCOM application, follow-up till net meter commissioning	1	Set
16	CFA / State Subsidy Documentation	MNRE portal registration, subsidy application, bank linkage	1	Set

05 Financial Savings & Cash Flow Projection

Projected returns, lifetime benefits, and payback period

₹0

ANNUAL BILL SAVINGS

At current tariffs

5.2 yrs

PAYBACK PERIOD

Breakeven estimate

₹5,11,912

25-YEAR RETURNS

Lifespan estimation

266%

25-YEAR ROI

Total yield ratio

10-YEAR CASH FLOW PROJECTION (4% ANNUAL TARIFF HIKE, 0.8% PANEL DEGRADATION)

YEAR	EST. GENERATION	ANNUAL SAVINGS	CUMULATIVE SAVINGS	NET POSITION (INR)
Year 1	4,380 kWh	₹24,090	₹24,090	-₹1,15,910
Year 2	4,345 kWh	₹25,054	₹49,144	-₹90,856
Year 3	4,310 kWh	₹26,056	₹75,200	-₹64,800
Year 4	4,276 kWh	₹27,098	₹1,02,298	-₹37,702
Year 5	4,242 kWh	₹28,182	₹1,30,480	-₹9,520
Year 6	4,208 kWh	₹29,309	₹1,59,789	+₹19,789
Year 7	4,174 kWh	₹30,482	₹1,90,271	+₹50,271
Year 8	4,141 kWh	₹31,701	₹2,21,972	+₹81,972
Year 9	4,107 kWh	₹32,969	₹2,54,941	+₹1,14,941
Year 10	4,075 kWh	₹34,288	₹2,89,229	+₹1,49,229

ENVIRONMENTAL IMPACT

Over 25 years, this solar system will offset approximately **90.0 Tons of CO₂ emissions**, which is equivalent to planting approximately **171 trees**.

06 Net Metering & Government Subsidy Process

Subsidy credit flow and bidirectional net meter integration

PM SURYA GHAR: MUFT BIJLI YOJANA

The Central Government provides financial assistance (CFA) under the PM Surya Ghar national portal. As an MNRE-empanelled EPC vendor, Enermass facilitates complete document submission and structural validation. Once the net meter is commissioned and inspected by DISCOM authorities, the subsidy amount is credited directly to the customer's linked bank account.

SUBSIDY DETAILS FOR YOUR QUOTE

PM Surya Ghar Subsidy Amount: **₹78,000**

Note: Subsidy calculations are based on official government guidelines: ₹30,000 per kW for first 2 kW, and ₹18,000 for the 3rd kW.

NET METERING INTEGRATION & EXPORT

Net metering allows you to export excess solar energy generated during daytime hours back to the grid. Your DISCOM bi-directional meter records both import (grid consumption) and export (solar excess). You will receive credits on your monthly billing invoice for all exported units, substantially dropping your net cost.

STEP-BY-STEP TIMELINE

- ✓ 1. Site survey & feasibility
- ✓ 2. DISCOM Feasibility approval
- ✓ 3. Plant installation (EPC)
- ✓ 4. Work completion report
- ✓ 5. Joint inspection & Net Metering
- ✓ 6. Subsidy release (60-90 days)

LIAISON SUPPORT


Enermass manages all application filings on the PM Surya Ghar and DISCOM portals, handling structural clearances and liaison with the electrical inspectorate.

07 Project Execution & Milestones

Implementation timeline and standard execution milestones

We coordinate the entire execution phase with qualified installers and engineers to ensure complete adherence to safety standards. The typical commissioning duration for a grid-connected system is 30–45 days, subject to DISCOM feasibility clearances and material dispatch timelines.

EXECUTION PHASES & MILESTONES

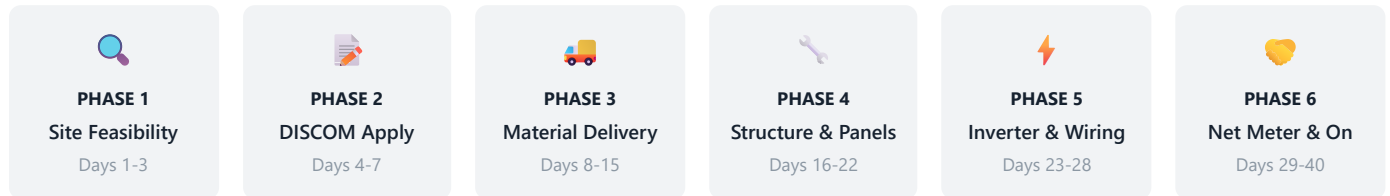

QUALITY CHECKS DURING EXECUTION

- ✓ Structural validation for wind load calculations and roof integrity.
- ✓ High-quality double insulated DC solar cables with MC4 connectors to ensure waterproof connections.
- ✓ Proper surge protection devices (SPDs) and earthings to protect the solar components from lightning.
- ✓ Site curing check on concrete foundations before mounting heavier frame assemblies.

08 Commercial Terms & Bank Details

Payment schedule, warranties, and official banking coordinates

TERMS & CONDITIONS

1. This proposal is valid for 30 days from the date of issue. Post expiry, all prices are subject to revision.
2. Payment milestones: 50% advance booking, 40% before material dispatch, 10% on grid commissioning & handover.
3. Installation completes within 15 working days from advance payment. Commissioning subject to DISCOM clearances (approx 30-45 days).
4. Solar PV Modules carry a 12-year product warranty and a 30-year linear performance output warranty.
5. Inverter carries a 10-year manufacturer warranty. Structural mounting MMS carries a 5-year warranty.
6. Includes 1-year free AMC post commissioning. Net metering application liaison support is provided by Enermass.
7. State Terms - Kerala: Installation complies with KSEB Net Metering Regulations 2014, ANERT/KSEBL empanelment, and requires Electrical Inspectorate approval.

PAYMENT SCHEDULE

1. Booking Advance (50%)	₹70,000
2. Before Delivery (40%)	₹56,000
3. Post Commissioning (10%)	₹14,000

BANK DETAILS

Account Name: Enermass Power Solutions Pvt. Ltd.

Bank / Branch: Bank of Baroda, Koratty

Account No: 85080200000055

IFSC Code: BARB0KORATT

UPI ID: enermass@barodampay

SCAN TO PAY VIA UPI



09

Customer Acceptance & Sign-off

Confirmation and order placement signatures

I hereby accept the techno-commercial proposal referenced herein, including the specified scope of supply (BOM), project timeline, and payment schedules. You are authorized to proceed with the engineering feasibility approvals and dispatch schedule upon receipt of the advance payment.

ORDER SUMMARY

Solar Plant Capacity:	3 kWp On-Grid
Total Project Value (incl. GST):	₹2,18,000
Govt Subsidy Assistance:	₹78,000
Net Customer Commitment:	₹1,40,000

For Enermass Power Solutions Pvt. Ltd.

For Customer Acceptance

Authorized Signatory
Date: 28 June 2026

Customer Signature & Stamp
Name: Mr. Linjith